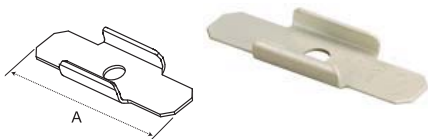
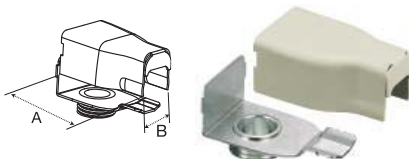
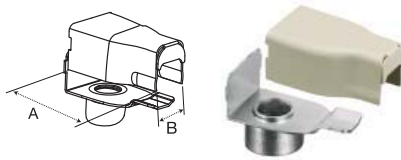
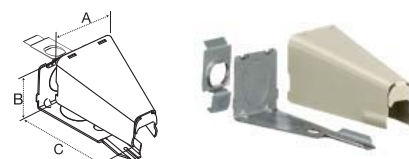
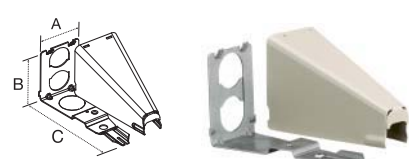



HBL500 and HBL750 Series

Fittings	HBL500 & HBL750 Series	Color
Support Clip For supporting lengths of HBL500 or HBL750 Raceway. 	HBL5703IV HBL5703W A: 2.51" (63.75)	Ivory White
Elbow Box Connector For connecting raceway at right angles to conduit boxes, panel boxes, etc. having KO for trade size conduit. 	HBL5783IV A: 2.13" (54.05) B: 1.24" (31.50)	Ivory
Elbow Conduit Connector For connecting raceway at right angles to ½ in. trade size conduit or armored cable connectors. 	HBL5784IV A: 2.13" (54.05) B: 1.24" (31.50)	Ivory
Combination Connector For connecting raceway, without offsetting, to any 3.25 in. (83.00) or 4 in. (102.00) outlet box mounted on the surface with a KO for ½ in. trade size conduit. Spring steel bushing (included) eliminates need for conduit nipple and locknut. 	HBL5785IV HBL5785W A: 1.64" (41.78) B: 1.27" (32.26) C: 2.90" (73.72)	Ivory White
Adjustable Offset Connector Two ½ in. KOs for panel or conduit connection. Eliminates offsetting raceway when connecting to surface type panel boxes. One ½ in. chase nipple and locknut furnished. 	HBL5786IV HBL5786W A: 1.50" (38.10) B: 1.84" (46.74) C: 3.89" (98.87)	Ivory White
Entrance Connector One ¾ in. KO for panel or conduit connection. One ¾ in. chase nipple and locknut furnished. 	HBL5786AIV HBL5786AW A: 1.50" (38.10) B: 1.84" (46.74) C: 3.89" (98.87)	Ivory White
Flexible Section For getting around offsets, side bends, twisted turns or curved surfaces. 	HBL5700FIV A: 18.00" (457.20)	Ivory
½ in. EMT Connector For connecting raceway to conduit boxes or panel boxes having KO for conduit. 	HBL5791 A: 1.20" (30.48) B: 1.09" (27.70)	Zinc Plated Steel