



Nylon Wallplates

Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.

- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.

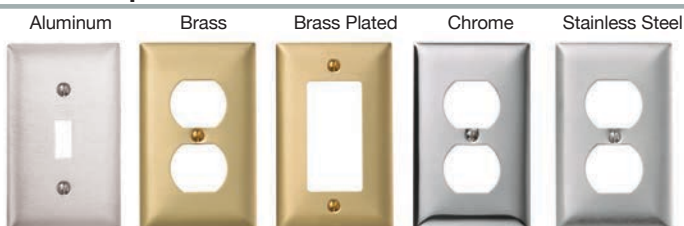
Nylon Wallplates



Nylon Pre-Marked Wallplates





Metal Wallplates



Pre-Marked



Combination Wallplates, 3-Gang

Description	Color	Nylon Standard	Nylon Mid-Size	Material	Metal Catalog Number
3-Gang, 2-Toggle, 1-Duplex 	Brown Gray Ivory Light Almond White	NP28 NP28GY NP28I NP28LA NP28W	NPJ28 — NPJ28I NPJ28LA NPJ28W	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430 Steel, Almond Steel, Gray	① ① SBP28 ① SS28 — SP28AL* SP28G*
3-Gang, 1-Toggle, 2-Duplex 	Black Brown Gray Ivory White	NP182BK NP182 NP182GY NP182I NP182W	— — — — —	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	① ① ① ① SS182 —
3-Gang, 2-Toggle, 1-Decorator 	Black Brown Gray Ivory Light Almond White	NP226BK NP226 NP226GY NP226I NP226LA NP226W	NPJ226BK NPJ226 NPJ226GY NPJ226I NPJ226LA NPJ226W	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430 Steel, Gray	① ① ① ① SS226 — PJS226G*
3-Gang, 1-Toggle, 2-Decorator 	Black Brown Gray Ivory Light Almond White	NP1262BK NP1262 NP1262GY NP1262I NP1262LA NP1262W	— — — — — —	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	① ① ① ① ① —
3-Gang, 2-Duplex, 1-Blank 	Black Brown Gray Ivory Light Almond White	— — — — — —	— — — — — —	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	① ① ① ① SS211 —
3-Gang, 1-Duplex, 1-Blank, 1-Duplex 	Black Brown Gray Ivory Light Almond White	— — — — — —	— — — — — —	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	① ① ① ① SS8147 —
3-Gang, 2-Toggle, 1-Blank 	Black Brown Gray Ivory Light Almond White	— — — — — —	— — — — — —	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	① ① ① ① SS213 —

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

①Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

*Powder coat paint finish.



Specifications

Listings

Non-Metallic Plates	UL Standard 514D.
Metallic Plates	UL Standard 514D.
Certification	UL Files #E31999, E92074. CSA Standard C22.2 No. 42.1. CSA File 1733174.

Nylon Plate

Thickness	.06 in. (1.5).
Mounting Screw(s)	Steel (painted slotted screw head).
Feature	Captive mounting screw hole.
Operating Temperature	-40°C to 85°C.
Appearance	Smooth.

302/304 Stainless Steel (18% Chromium, 8% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (18% chromium, 8% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

430 Stainless Steel (17% Chromium, less than 0.5% Nickel) Plate

Thickness	.035 in. (0.9) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass (70% Copper, 30% Zinc) Plate

Thickness	.04 in. (1.0).
Mounting Screw(s)	Brass (70% Copper, 30% Zinc). Slotted screw head.
Appearance	Horizontal brushed finish.

Aluminum Plate

Thickness	.05 in. (1.3).
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Horizontal brushed finish.

Brass Plated Steel Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Brass slotted head.
Appearance	Polished, coated to inhibit oxidation.

Chrome Plated Steel Plate




Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	302/304 stainless steel (17% chromium, less than 0.5% nickel). Slotted screw head.
Appearance	Polished, coated to inhibit oxidation.

Steel Painted Plate

Thickness	.03 in. (0.8) nominal.
Mounting Screw(s)	Steel (painted slotted screw head).
Appearance	Powder coat paint.

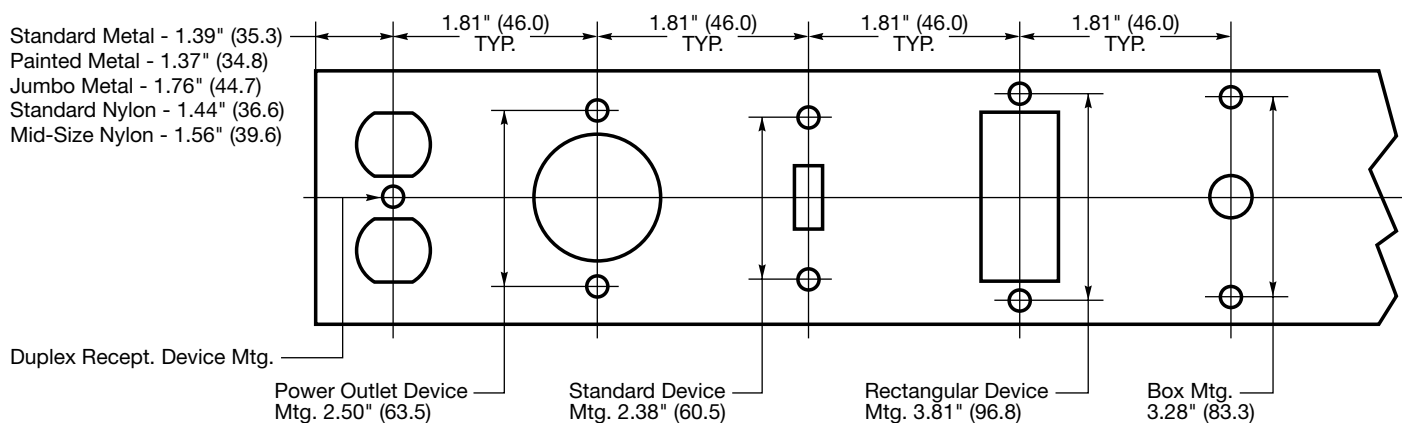


Product Dimensions

	Size	Standard Metal		Painted Metal	Size	Jumbo Metal	
		Height	Width	Width		Height	Width
	1-Gang	4.50" (114.3)	2.87" (72.9)	2.75" (69.8)	1-Gang	5.25" (133.4)	3.50" (88.9)
	2-Gang	4.50" (114.3)	4.60" (116.8)	4.56" (115.8)	2-Gang	5.25" (133.4)	5.31" (134.9)
	3-Gang	4.50" (114.3)	6.41" (162.8)	6.38" (162.1)			
	4-Gang	4.50" (114.3)	8.22" (208.8)	8.18" (207.8)			
	5-Gang	4.50" (114.3)	10.03" (254.8)	10.00" (254.0)			
	6-Gang	4.50" (114.3)	11.81" (300.0)	11.81" (300.0)			
	7-Gang	4.50" (114.3)	13.68" (347.5)				
	8-Gang	4.50" (114.3)	15.44" (392.1)				
	Size	Standard Nylon			Size	Mid-Size Nylon	
		Height	Width			Height	Width
	1-Gang	4.63" (117.6)	2.88" (73.2)		1-Gang	4.88" (124.0)	3.13" (79.5)
	2-Gang	4.63" (117.6)	4.69" (119.1)		2-Gang	4.88" (124.0)	4.94" (125.4)
	3-Gang	4.63" (117.6)	6.50" (165.1)		3-Gang	4.88" (124.0)	6.75" (171.5)
	4-Gang	4.63" (117.6)	8.31" (211.1)		4-Gang	4.88" (124.0)	8.56" (217.4)
	5-Gang	4.63" (117.6)	10.12" (256.1)				
	6-Gang	4.63" (117.6)	11.93" (303.0)				
	Size	Snap-On Nylon					
		Height	Width				
	1-Gang	4.68" (118.9)	2.94" (74.7)				
	2-Gang	4.68" (118.9)	4.75" (120.7)				
	3-Gang	4.68" (118.9)	6.56" (166.6)				
	4-Gang	4.68" (118.9)	8.37" (212.6)				
	5-Gang	4.68" (118.9)	10.18" (258.6)				
	6-Gang	4.68" (118.9)	11.99" (304.5)				

Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical



Note: Specifications are subject to change without notice.