

DESCRIPTION


Lotolite 4" Slim Panel - delivering an impressive high-lumen output of 1000 lm from 9W, ensuring bright, efficient lighting for any space

FEATURES & BENEFITS

- Up to 120 lm/W - Best in Class Efficiency
- 5 CCT Field Selectable 2700-3000-3500-4000-5000K
- Type IC, Air-Tight & Wet Location Rated - No Housing Required
- CRI 90+ for true color rendering
- 1/2" Ultra Slim Profile

INSTALLATION INSTRUCTIONS

DIMENSIONS ID 4" OD 4 7/8" Cut Out 4 1/4"

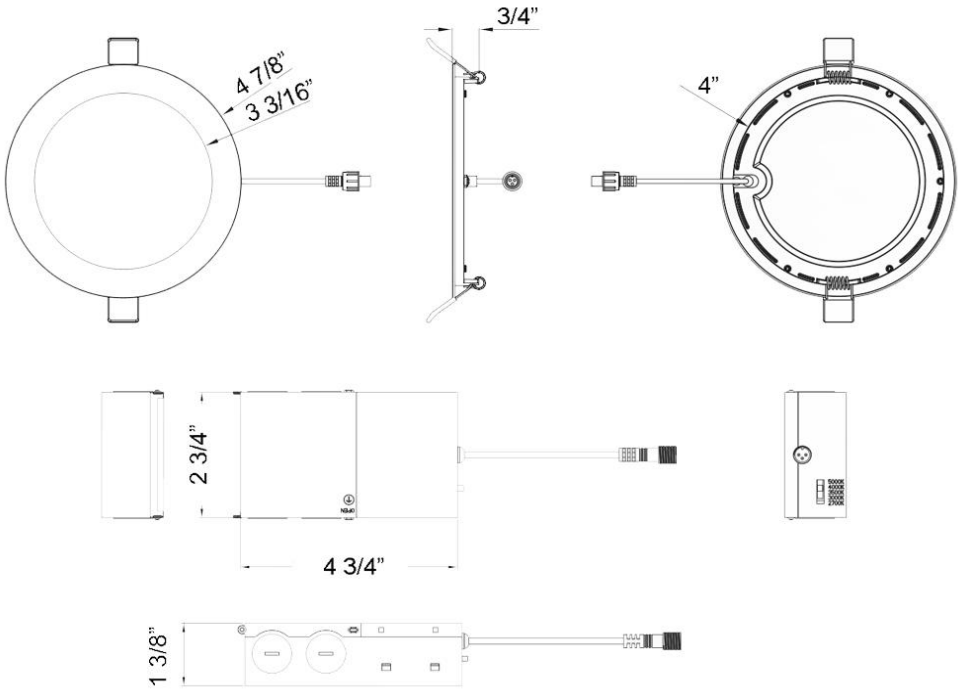

ORDERING GUIDE

SC-DL09-D04H-A1-61RE-WH
SC-DL09-D04H-A1-61RE-BK

[White Trim](#)
[Black Trim](#)



SC-DL09-D04H-A1-61RE

Lotolite 4" Slim Round Panel LED 1000 lm 9W

Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Renovations & New Construction
Power	9 W
Color Temperature (K)	2700 - 3000 - 3500 - 4000 - 5000
Light Output (lm)	960 - 980 - 1015 - 1030 - 1020
Halogen Equivalent	100 W
Beam Angle	110°
CRI	90+
Driver Input	100-130 V AC
Dimming	TRIAC Dimmers 10% - 100%
Junction Box Volume	8.4 cubic inches / Max 5 No 12 AWG or 7 No 14 AWG
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, FCC, Energy Star, JA8
Warranty	3 Year



ACCESSORIES

Sold Separately



[13" Mounting Plate Flat model # MP4-2](#)



[13" Mounting Plate Flanged model # MP4](#)



[26" Flat Rough-In Plates model # RIP414](#)



[Flanged Plate with Hanger Bars model # FRP4](#)



[Goof Ring OD 5 3/4" White # GR4](#) [Black # GR4-BK](#)



[Jumper Cable 10 ft. Model # JC-5CCT-10](#)



Emergency Driver 8W 120-347V input
[model # BLD-HM08D-YYY](#)

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500
Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses
warehouses

Lotus LED Lights CANADA

1080 Cliveden Ave # 6, Delta BC V3M 6G6 tel 604-538-3090
Delta BC & Mississauga ON