


LED 6" RESIDENTIAL RETROFIT
ADJUSTABLE DOWNLIGHT SERIES

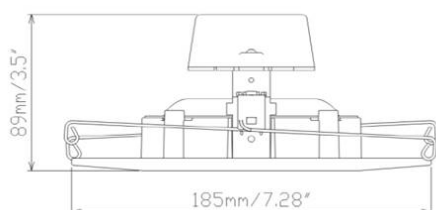

PRODUCT DESCRIPTION:

MaxLite's Adjustable LED Recessed Downlight Retrofit is a versatile light source for most five and six-inch recessed downlight fixtures. Compatible with 120V systems, the 11W LED retrofit delivers 750 lumens with excellent uniformity and color rendering, in color temperatures ranging from warm to cool white.

FEATURES:

- Suitable for wet locations
- Five year limited warranty

ELECTRICAL:

- 120V, 60Hz
- 0-10V dimming, down to 10%
- L70 of 35,000 hours
- Power factor: ≥ 0.9

MODEL SELECTION		Typical order example: RRA61130W		
RRA	6	11		W
FAMILY	SIZE	WATTAGE (NOMINAL)	CCT	TRIM
RRA= Residential Retrofit Adjustable Downlight	6= 6"	11= 11W	30= 3000K	W= White

ORDER CODE	MODEL NUMBER	WATTAGE	CCT
1410198	RRA61130W	11W	3000K

COMPATIBLE DIMMERS:

AH SDM3/1000
AH SDM/600
CTL DM600-12-3
GE 18024
LUXDM600-12

LEVITON 6683
LEVITON 6631-LA
LEVITON 6631-A
LEVITON NO.6672
LEVITON NO.IPL06
LEVITON IPI10-1LZ

LUTRON DV-603PH
LUTRON S-603P
LUTRON S-10PH
LUTRON TG-603P
LUTRON D-603P
LUTRON AY-600P

LUTRON AYCL-153PH
LUTRON SELV-300P-WH
LUTRON DV-600P
LUTRON SCL-153PH
LUTRON MACL-153MH
LUTRON DVCL-253PH
LUTRON MSCL-OP153MH

SPECIFICATIONS:

		RRA611xxW
ITEM	SPECIFICATION	DETAILS
GENERAL PERFORMANCE	Power Consumption (W)	11W
	Lumens Delivered (lm)	750 lm
	Efficacy (lm/W)	68.2 lm/W
	Color Temperature (CCT)	3000K (Additional CCT available, contact MaxLite for info.)
	L70 Lifetime (hours)	35,000
	Color Consistency	Proprietary binning for uniform color
	CRI	≥80
ELECTRICAL	Power Factor	0.9
	Input Voltage	120V
CERTIFICATION	Certification	Classified cULus, FCC
	Material Usage	RoHS compliant; no mercury
	Environment	Damp
	Warranty	5 years