




LED FIXTURE

RIGID Series

LED Backlit Panel

RGD-BLP

Ultra Slim LED Backlit Panel Luminaire with the latest options,
Multiple Wattage - Multiple Kelvin, Auto-Sensing Driver

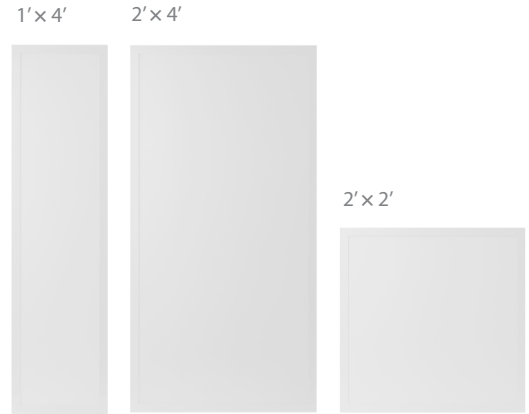

Features & Benefits

cUL listed, DLC

Multiple Wattage and Multiple Kelvin (CCT)

Ultra slim design, no UV & IR emission

3 Convenient sizes (1'x4', 2'x4', 2'x2')

120-347V Auto-sensing driver, PF >0.9

L70 @ 50,000 Hrs, CRI ≥80

0-10V Dimmable

Aluminum body, PMMA lens, 120° beam angle


Excellent illuminating surface uniformity

Damp location rated

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +40°C




Clip

T-Bar


For recessed grid ceiling installations, our mounting clips may be used to securely mount the RGD-BLP luminaire to the T-Bar frame or as to act as suspension points.

Dimensional drawing


TOP VIEW (2x4)

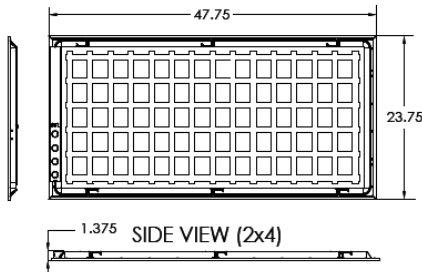


TOP VIEW (1x4)

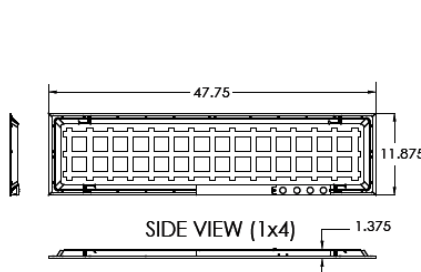

TOP VIEW (2x2)

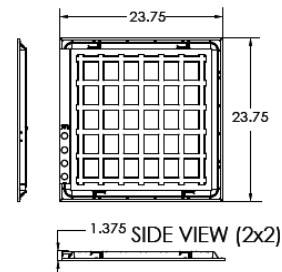

Note: Frame is the same size for 1x4, 2x2 & 2x4



Ordering Information


Example: RGD-BLP/22/MW/MK/120-347/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable
RGD (Rigid)	BLP (Backlit Panel)	22 (2'x2')	40W-36W-30W (2'x2')	35-40-50K	120-347V	D (0-10V Dim)
		14 (1'x4')	40W-36W-30W (1'x4')			
		24 (2'x4')	45W-40W-36W (2'x4')			

	W	L	H
2'x2'	23.75"	23.75"	1.375"
1'x4'	11.875"	47.75"	1.375"
2'x4'	23.75"	47.75"	1.375"

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Case QTY.
3665306	Yes	RGD-BLP/22/MW/MK/120-347/D	40-36-30W	120-347V	50,000	3150-3780-4200	35K-40K-50K	>80	2
3665307	Yes	RGD-BLP/14/MW/MK/120-347/D	40-36-30W	120-347V	50,000	3150-3780-4200	35K-40K-50K	>80	2
3665308	Yes	RGD-BLP/24/MW/MK/120-347/D	45-40-36W	120-347V	50,000	3780-4200-4725	35K-40K-50K	>80	2

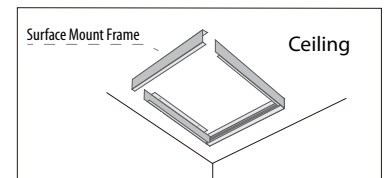

Ordering Code	Model Number	Description	Ordering Code	Model Number	Description
3660148	RGD-BLP/22/FRM/WH	Surface Mount Frame 2'x2' White	3660149	RGD-BLP/14/FRM/WH	Surface Mount Frame 1'x4' White
3660150	RGD-BLP/24/FRM/WH	Surface Mount Frame 2'x4' White	3660151	RGD-BLP/SUSP	Suspension Kits, (2 10' AC Cable Hangers per Kit)

