

Description

The Venture Lighting LED Gas Station canopy is a surface mount luminaire with a low profile, lightweight design featuring long life and low maintenance. These IP65 rated fixtures are designed for easy replacement of existing gas station canopy fixtures.

Construction

The housing unit is constructed from heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating. To ensure weather-tight protection, each optical assembly is sealed with a silicone gasket.

Electrical

The power supply has a range of 120-277V, 50/60 Hz.

Mounting

The fixture is designed for surface mounting.

Warranty

For warranty information refer to:

<https://www.venturelighting.com/resources/warranties/>

Model# CPT-150SAF-WH50

Product Performance

Wattage	150W
Lumens	21029
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	≥80
Lumen Maintenance @50,000 hours*	90%
Calculated L70 @ 25°C Ambient in Hours*	174,000
Dimming	No
Operating Temperature Range	40°F to 104°F (-40°C to 40°C)

Physical Characteristics

Fixture Color	White
Length	20.47" (520mm)
Width	20.47" (520mm)
Height	9.65" (245mm)
Weight	17 lbs (7.7 KG)

Electrical Characteristics

Input Voltage Range	120-277V, 50/60 Hz, 1.3A max
Amperage Draw (Input Volts/Amps)	120/1.30 208/0.75 240/0.65 277/0.56
Power Factor	≥90%
THD	≤20%

Regulatory Qualifications

UL Listed

DLC® Premium Qualified




IP65 Rated for Wet Locations

Notes:

*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21



Venture 150W LED Gas Station Canopy

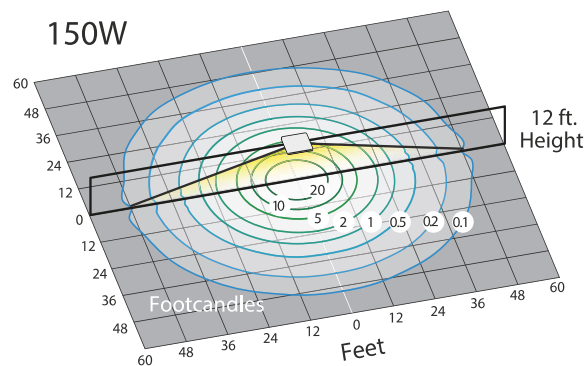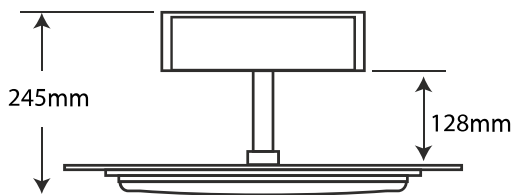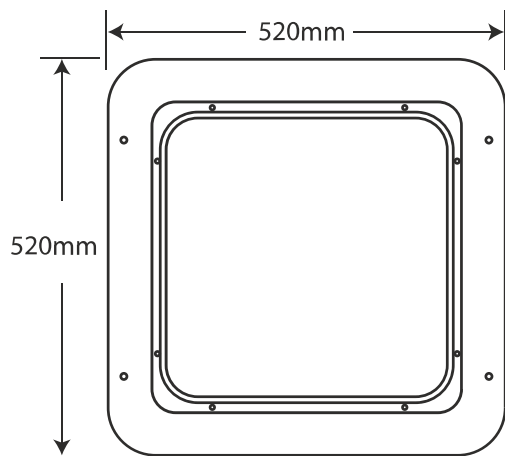

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

